MOUNTING AND MAINTENANCE INSTRUCTION

ITALO 2 luminaire is classified under "**EXEMPT GROUP**" according to photobiologycal safety standard **IEC/EN 62471**.

NO RISK
for the operators and end users.

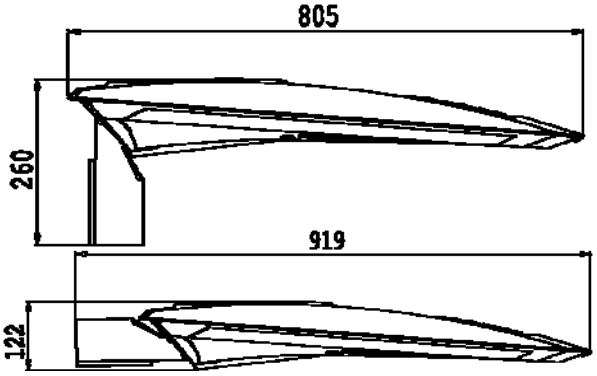

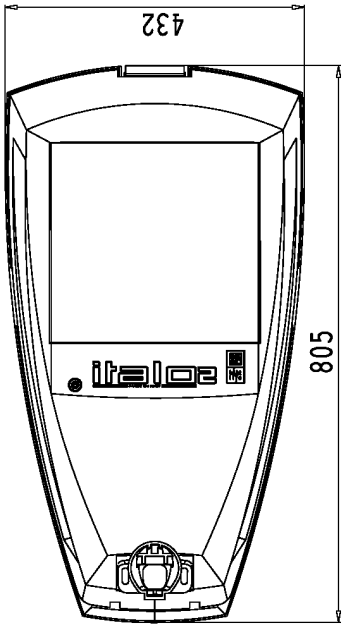

Side area:	0.08m²
Base area:	0.30m²
Form factor:	1.2
Max height of installation:	15 m
Ta	5 °C
Use	Indoor / Outdoor
ITALO 2 1M – 2M	10.9kg ÷ 11.2kg OEV
ITALO 2 3M – 5M	11.3kg ÷ 11.6kg OEV
ITALO 2 6M – 8M	11.8kg ÷ 12kg OEV

The crossed-out wastebasket symbol on the appliance means that at the end of its useful lifespan, the product must be disposed of separately from ordinary household wastes. The user is responsible for delivering the appliance to an appropriate collection facility at the end of its useful lifespan. Appropriate separate collection to permit recycling, treatment and environmentally compatible disposal helps prevent negative impact on the environment and human health and promotes recycling of the materials making up the product. For more information on available collection facilities, contact your local waste collection service.

WIRING SCHEME

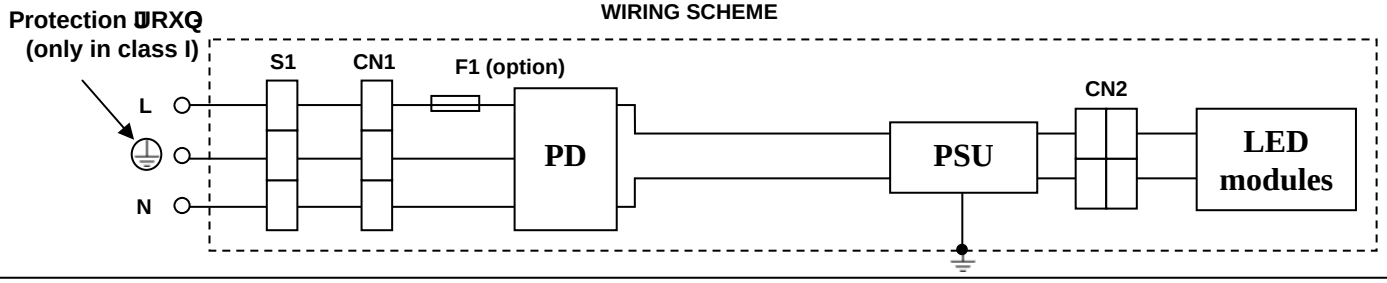

PLM WIRING SCHEME

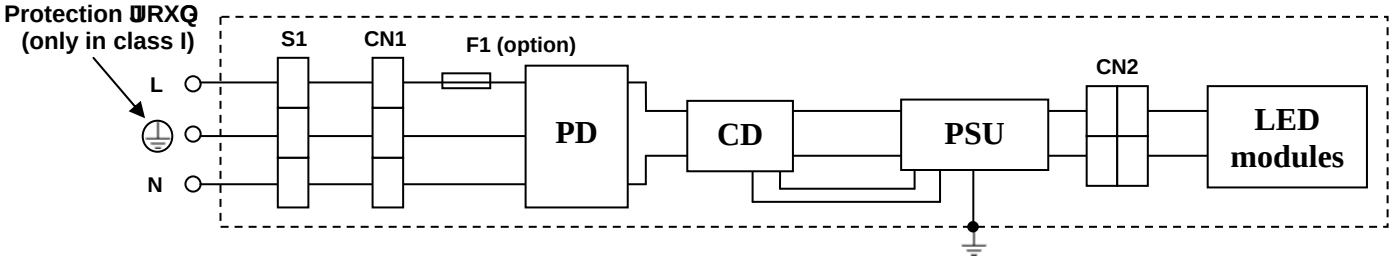

F	Fuse Vac 10A (provide th e fuse externally if not present into the luminaire)	**PD**	Protection device
CN	Connector	**PSU**	Power Supply
S	On-load switch	**CD**	Control device

NOTE



a) The luminaire can be installed close to flammable surfaces.
b) Class II luminaires must be installed in such a way that it is impossible for any exposed metal part to come in contact with electrical components.
c) The device has deG in compliance with the current standards; it is necessary that the installation is done properly, according with the instructions supplied.
d) The present instruction paper has to be kept for any future maintenance operation on the luminaire. Non compliance with the above will automatically release AEC Illumina rom any responsibility.